


INVENGO XWING™ WET INLAY



100% of real size

Impinj Monza 5

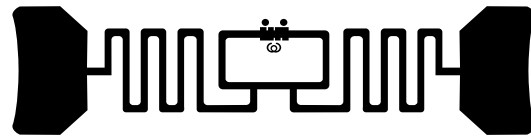

About Invengo's xWing™

The Invengo xWing™ tags and inlays, equipped with the Impinj Monza™ 5 IC's, are designed to enable end-users to reach and sustain high levels of performance in all global RAIN RFID (UHF) frequency regions. Within the area of apparel, brand protection, industrial and supply chain management solutions, Invengo's xWing™ tag and inlays can be called one of the best in class and are approved in most University of Auburn categories.



Invengo – the global RFID technology provider – is a leading developer and manufacturer of high quality, intelligent RAIN RFID (UHF) and HF/NFC connectivity solutions and consumables (tags & inlays) utilized in the Internet of Things. With a focus on RFID innovation, Invengo has created a leading product line in retail, (industrial) laundry, library, (public) transportation, healthcare and many other industries.

Invengo Technology Pte. Ltd. (SG) is the International Headquarters of Invengo Information Technology Co. Ltd, listed on Shenzhen Stock Exchange (SZSE: 002161.SZ). Employing over 600 people globally, Invengo is one of the largest publicly traded, RFID oriented companies in the world.

Key Benefits

- High Supply Chain performance for a wide range of applications
- Compact slim design
- University of Auburn approved
- Serialized TID
- ISO 9001:2008 Quality Management System and ISO 14001:2004 Environment Management System support
- 100% Quality Tested

Application Areas

- Item Level
- Retail
- Logistics

Product Specifications

RFID

| | |
|--------------------------------|--|
| Protocols Supported | EPCglobal C1 Gen 2, ISO/IEC18000-63 |
| Integrated Circuit (IC) | Impinj Monza 5 |
| Operating Frequency | 840 to 960MHz |
| EPC size | 128 bits |
| TID | 32 bits and 48 bits serialized number |
| Access password | 32 bits |
| Kill password | 32 bits |

Environmental

| | |
|------------------------------|---|
| Operating Temperature | -40°C to 85°C (-40°F to 185°F) |
| Recommended | -20°C to 77°C (-4°F to 122°F) |
| Storage Temperature | -40°C to 85°C (-40°F to 185°F) |
| Recommended | 25°C (77°F) |
| Shelf Life | Min. 2 yrs from date manufacturing in 20°C (68°F) @ 50% RH |
| Bending Diameter | > 50 mm, tension max. 10 N |
| Static Pressure | <10 MPa (10 N/mm ²) |
| ESD | ± 2000V peak |
| Adhesive | Acrylic |
| Data retention | 50 years |
| Endurance | 100.000 cycles |

Dimensions

| | |
|-----------------------------|-----------------------------|
| Antenna Size (A x B) | 69 x 17 mm (2.72 x 0.70 in) |
| Die-cut Size (C x D) | 70 x 19 mm (2.76 x 0.75 in) |
| Web Width (E) | 78 mm (3.07 in) |
| Pitch (F) | 22,5 mm (0.88 in) |
| PET Thickness | 0,05 mm (0.002 in) |
| Antenna Thickness | 0,009 mm (0.0003 in) |
| Die-cut to edge (G) | 2 mm (0.08 in) |
| Core Size (H) | 76 mm (3.00 in) |


Certifications

| | |
|--------------------------------|-------------------------|
| ARC Approval Categories | Spec: A-B-C-D-G-M-N-K-Q |
| Retail Approval | Macy's, Target |


Order Information

| | |
|---------------------------------------|--|
| Product code | XC-TF8029-A-C13-FSI |
| Packaging | Carton boxes |
| Box Size | 265x253x180mm (10.43 x 9.96 x 7.09 in) |
| Weight | ± 2,8 kg (6.17 lbs)/roll ± 6 kg (13.23 lbs)/box |
| Quantity pc p/roll; roll p/box | 10000 pcs/roll; 2 roll/box |


Inlay Design



Inlay Stackup



Winding / Dimensions

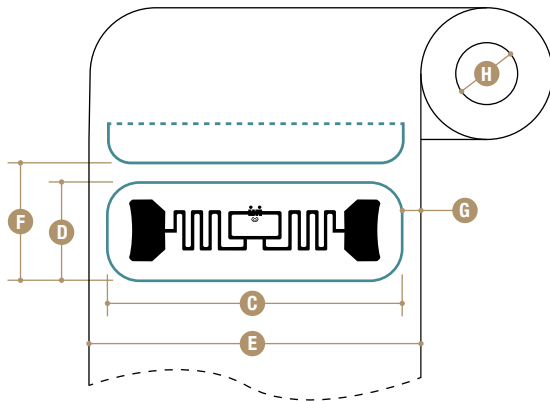

APAC / International HQ

Invengo Technology Pte. Ltd

10 Kallang Avenue
#05-15 Tower 2, Aperia
Singapore 339510

Office: +65 6702 3909
sales.apac@invengo.com

Americas

Invengo Technology Corp.

2700-160 Sumner Blvd.
Raleigh, NC 27616
United States of America

Office: +1 919 890 0202
sales.americas@invengo.com

EMEA / Global Textile Services

Invengo Technologies

180 Voie Ariane – Athélie 1
13600 La Ciotat
France

Office: +33 413 96 1111
sales.emea@invengo.com