

INVENGO TOME LABEL



80% of real size

NXP G2iM



About Invengo's Tome

The Invengo Tome inlays equipped with the NXP G2iM are designed to enable end-users to reach and sustain high levels of performance in all global RAIN RFID (UHF) frequency regions. The Invengo Tome inlays come with dual adhesive allowing it to be invisibly integrated within books and magazines, making it an ideal solution for item-level tagging in library and retail environments.



Invengo – the global RFID technology provider – is a leading developer and manufacturer of high quality, intelligent RAIN RFID and HF/NFC connectivity solutions and consumables (tags & inlays) utilized in the Internet of Things. With a focus on RFID innovation, Invengo has created a leading product line in retail, (industrial) laundry, library, (public) transportation, healthcare, and many other industries.

Invengo Technology Pte. Ltd. (SG) is the International Headquarters of Invengo Information Technology Co. Ltd, listed on Shenzhen Stock Exchange (SZSE: 002161.SZ). Employing over 600 people globally, Invengo is one of the largest publicly traded, RFID / IoT oriented companies in the world.

Key Benefits

- High performance product for item-level tagging
- Especially designed to be invisibly integrated in books
- The dual adhesive and slim design ensures easy application
- Serialized TID
- ISO 9001:2008 Quality Management System and ISO 14001:2004 Environment Management System support
- 100% Quality Tested

Application Areas

- Library
- Retail
- Asset tracking

Product Specifications

RFID

Protocols Supported	EPCglobal C1 Gen 2, ISO18000-6C
Integrated Circuit (IC)	NXP G2iM
Operating Frequency	840 to 960MHz
EPC size	128 bits
TID	96 bits serialized
User Memory	640 bits
Access password	32 bits
Kill password	32 bits

Environmental

Operating Temperature	-40°C to 85°C (-40°F to 185°F)
Recommended	-20°C to 50°C (-4°F to 122°F)
Shelf Life	Min. 2 yrs from date manufacturing in 20°C (68°F) @ 50% RH
Bending Diameter	> 50 mm, tension max. 10 N
Static Pressure	<10 MPa (10 N/mm ²)
ESD	± 2000V peak
Adhesive	Acrylic

Dimensions

Antenna Size (A x B)	100 x 3,5 mm (3.94 x 0.14 in)
Die-cut Size (C x D)	104 x 5,5 mm (4.09 x 0.22 in)
Web Width (E)	108 mm (4.25 in)
Pitch (F)	20.07 mm (0.79 in)
PET Thickness	0,05 mm (0.002 in)
Antenna Thickness	0,009 mm (0.0003 in)
Die-cut to edge (G)	2 mm (0.08 in)
Core Size (H)	76 mm (3 in)

Order Information

Product code	XCTF-8102B-C12
Packaging	Carton boxes
Quantity pc p/roll; roll p/box	10,000pcs/roll, 4 rolls/box
Yield rate	≥ 96%


Inlay Design



Inlay Stackup

	Silicone Liner
	Adhesive
	PET Substrate
	Aluminium Antenna
	IC
	Adhesive
	Silicone Liner

Winding / Dimensions

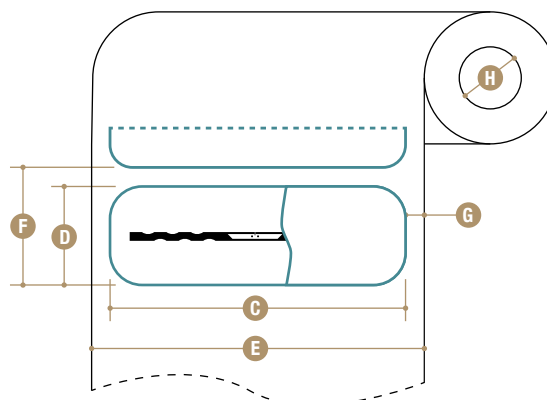

APAC

Invengo Technology Pte. Ltd
10 Kallang Avenue
#05-15 Tower 2, Aperia
Singapore 339510

Office: +65 6702 3909
sales.apac@invengo.com

Americas

Invengo Technology Corp.
2700-160 Sumner Blvd.
Raleigh, NC 27616
United States of America

Office: +1 919 890 0202
sales.americas@invengo.com

EMEA

Invengo Technologies
180 Voie Ariane – Athélia 1
13600 La Ciotat
France

Office: +33 413 96 1111
sales.emea@invengo.com